


- ◆ High gain, low cost circuit design
- ◆ Low profile and rugged design for outdoor use
- ◆ US Engineered
- ◆ Manufactured under strict US quality control procedures
- ◆ Fits with ARC's IES™, Integrated Enclosure Solution SOLD SEPARATELY— Part # ARC-IE1001K99 or ARC-IE2000K01 (Gen II); ARC ABS™, Articulating Bracket Solution included with ARC-IE2000K01
- ◆ Custom Enclosures Available

### ARC-IA3515B03

Electrical Specifications	
Frequency Range	3.3-3.8GHz
Gain	15dBi
3dB Beamwidth Vertical/Horizontal	25 degrees/35 degrees
Polarization	Single linear, horizontal or vertical
VSWR	≤1.5:1 typ., ≤1.7:1 max.
Front-to-Back Ratio	≤30 dB
Cross Polarization	≤20 dB
Power Rating	30 watts
Impedance	50 ohms
Lightning Protection	DC ground
Connector Type	R/A SMA Jack


Ordering Information	
Part #	Description
ARC-IA3515B03	3.5GHz 15dBi, R/A SMA Flange Mount Jack

Shipping Information	
Sizes and Weights	Description
13in x 12in x 12in (33.0cm x 30.5cm x 30.5cm) 16lb (7.3kg)	Bulk Pack, includes 10 single packs in an over pack box

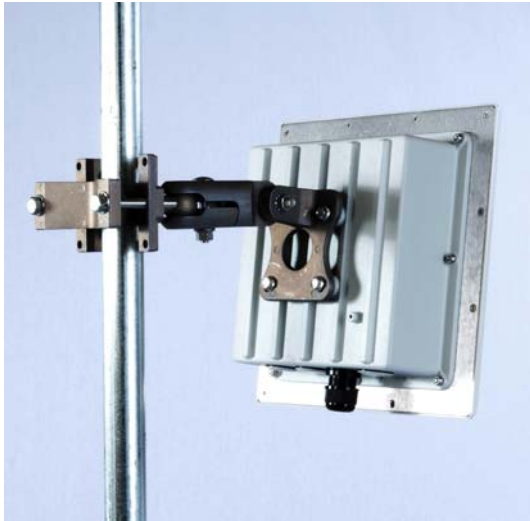

Mechanical and Environmental Specifications	
Length x Width x Depth	10.4in x 10.4in x .49in (26.4cm x 26.4cm x 1.2cm)
Weight	1.26lb (0.57kg)
Backplane	Aluminum
Radome	UV stabilized ABS plastic, gray
Wind Survivability	125mph (201kph)
Wind Load	0.75ft <sup>2</sup> (0.069m <sup>2</sup> )
Operating Temperature Range	-49°F to +149°F (-45°C to +65°C)
Pole Mount Diameter Range	0.75in to 3.0in (1.9cm to 7.6cm)

RF Patterns  
Vertical Cut, typ.



RF Patterns  
Horizontal Cut, typ.

