

Standalone Panel Antenna

3.3-3.8GHz 20dBi



- ◆ Innovative / cost effective / patented circuit design
- ◆ UV stabilized plastic / rugged design for outdoor use
- ◆ Low Profile
- ◆ Articulating wall/pole bracket (BRA-A-1699-02) included

ARC-PA3520B01

Electrical Specifications	
Frequency Range	3.3-3.8GHz
Gain	20dBi
3dB Beamwidth Vertical/Horizontal	12deg/13deg
Polarization	Single linear, horizontal or vertical
VSWR	≤1.5:1 typ., ≤1.7:1 max.
Front-to-Back Ratio	>30 dB
Cross Polarization	>30 dB
ETSI	TS 2
Power Rating	30 watts
Impedance	50 ohms
Lightning Protection	DC ground
Connector Type	N Jack

Ordering Information	
Part #	Description
ARC-PA3520B01	3.3-3.8GHz 20dBi Panel Antenna, N Jack

Shipping Information	
Sizes and Weights	Description
22in x 19in x 19in (55.9cm x 48.3cm x 48.3cm) 41lb, (18.6kg)	Packaging includes 10 units, including 10 mounting bracket kits in a single over pack box


Standalone Panel Antenna

3.3-3.8GHz 20dBi



Mechanical and Environmental Specifications	
Length x Width x Depth	15.4in x 15.4in x 1.7in (39.1cm x 39.1cm x 4.3cm)
Weight	2.2 lb (1 kg)
Backplane	Aluminum
Radome	UV stabilized ABS plastic
Wind Survivability	125mph (201kph)
Wind Load	1.23ft ² (0.12m ²)
Operating Temperature Range	-49°F to +149°F (-45°C to +65°C)
Pole Mount Diameter Range	0.75in to 2.0in (1.9cm to 5.1cm)

RF Patterns
Vertical Cut, typ.

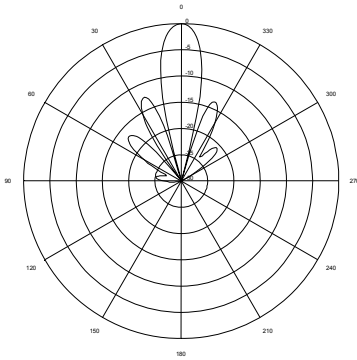

RF Patterns
Horizontal Cut, typ.

